



SWAY BRACE COMPONENTS

SSB0301 – Bracing Clamp


- **Function:** Braces pipe against sway or seismic disturbance. Versatile design provides ability to function in lateral or longitudinal direction at any angle.
- **Size:** Braces pipe from 1" to 8".
- **Finish:** Zinc plated. Other finishes upon request.
- **Material:** Carbon steel
- **Installation:** Place SSB0301 around pipe to be braced, and position attachment as needed. Tighten clamping bolts. Insert bracing pipe into the attachment jaw and tighten the break-off bolt until the hex head breaks off.
- **Qualification:** Comply with NFPA 13 and UL listed.

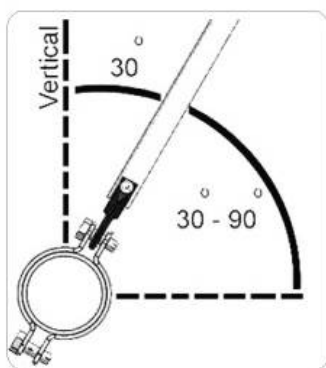

Lateral

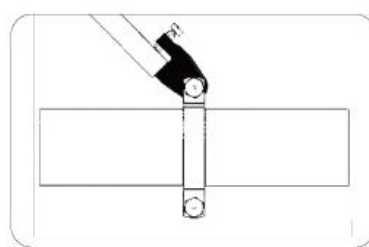

Longitudinal

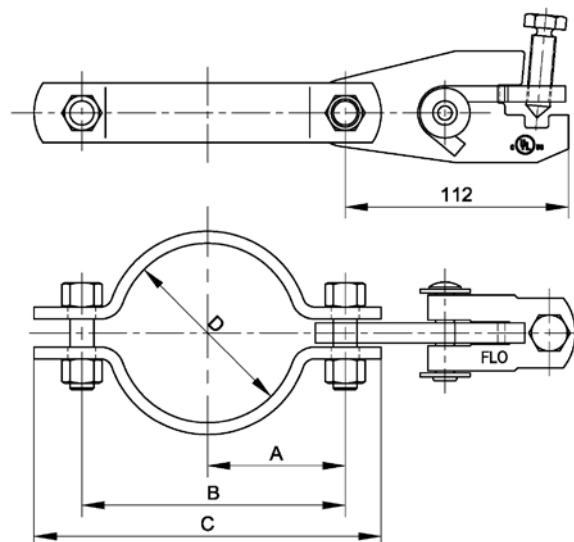

Dimensions

Pipe Size	D	A	B	C	Brace Member	Max. Design Load
in	mm	mm	mm	mm		lbs. (kN)
1	33.5	41.5	77	113	1" SCH40 Pipe	1000 (4.45)
1-1/4	43	46.5	87	123	1" SCH40 Pipe	1000 (4.45)
1-1/2	49	50	94	130	1" SCH40 Pipe	1000 (4.45)
2	61	55	104	140	1" SCH40 Pipe	1000 (4.45)
2-1/2	76	62.5	119	155	1" SCH40 Pipe	1000 (4.45)
3	90	69	132	168	1" SCH40 Pipe	1000 (4.45)
4	115	82.5	159	195	1" SCH40 Pipe	1000 (4.45)
5	141	97.5	195	231	1" SCH40 Pipe	1600 (7.12)
6	168	110	220	256	1" SCH40 Pipe	1600 (7.12)
8	220	145	290	334	1" SCH40 Pipe	2015 (8.96)

